


NEW COLLECTION

# ARCHITEXTURE


CARPET TILES

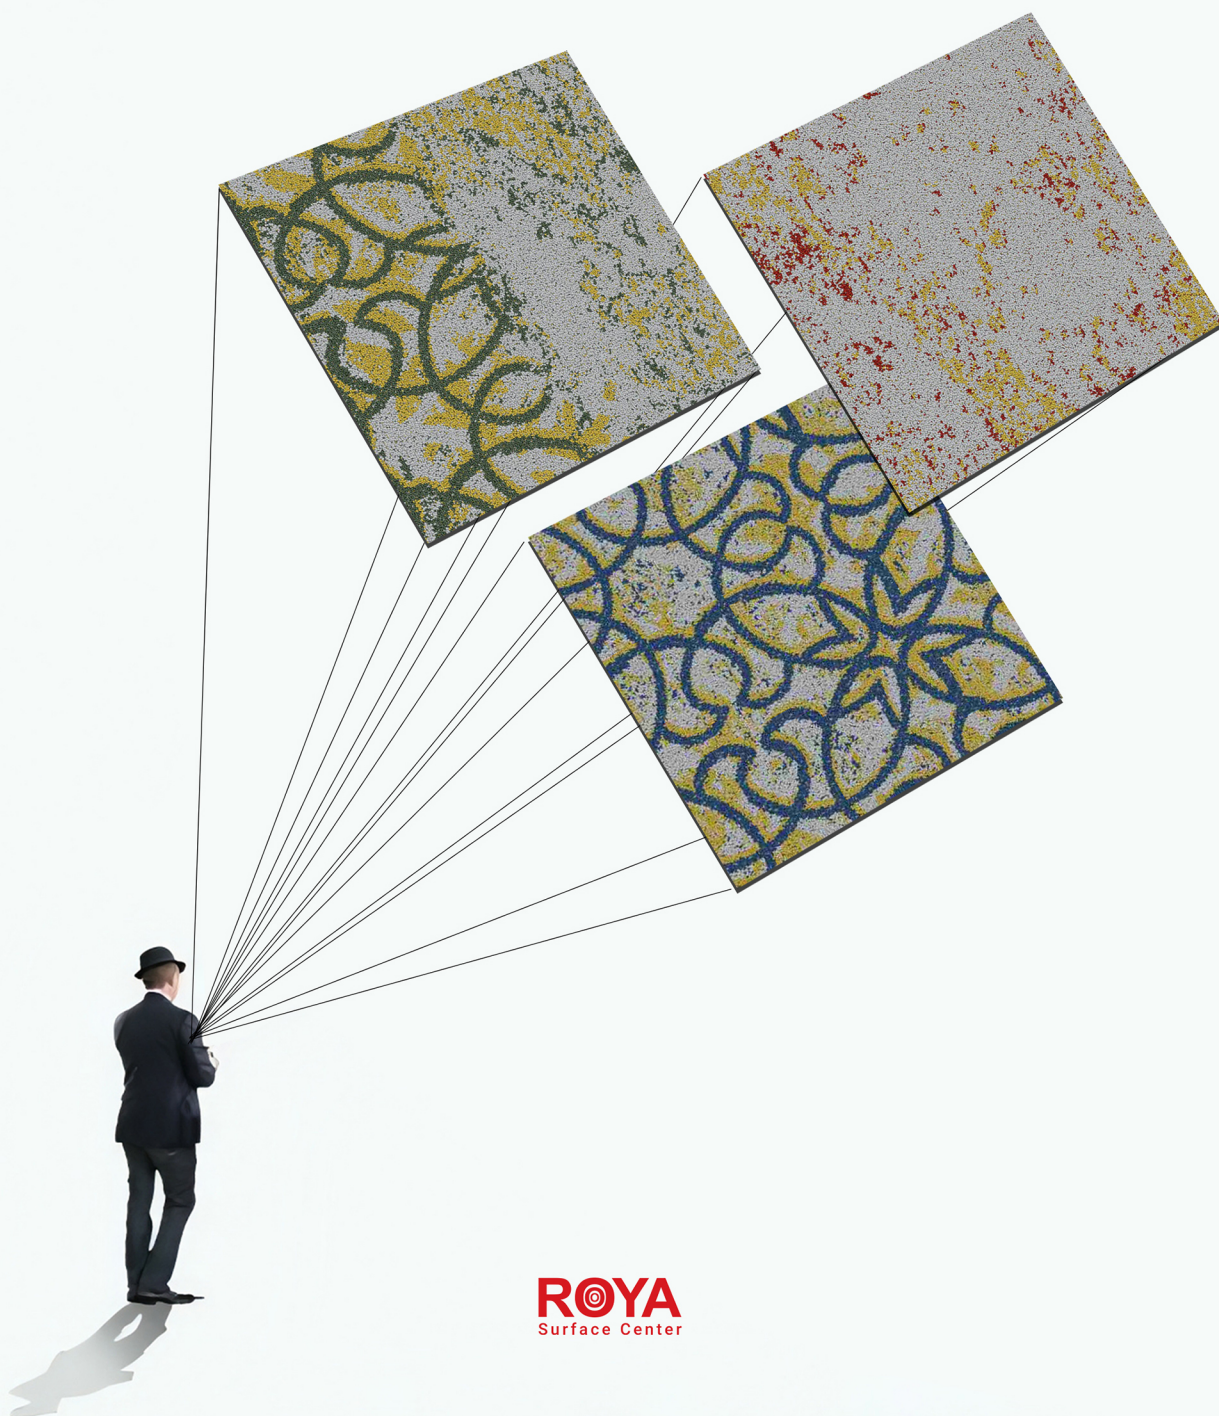


**ROYA**  
Surface Center

# Architecture Collection


## Carpet Tiles




Architecture Modern




Architecture Modern




Architecture Modern




Architecture Modern




Architecture Transition




Architecture Transition




Architecture Transition




Architecture Transition




Architecture Classic




Architecture Classic




Architecture Classic




Architecture Classic



1051



1052



1053



1054



# Architexture Collection

## Carpet Tiles



## Specifications

|                       |                             |
|-----------------------|-----------------------------|
| Style name:           | Architexture                |
| Product type:         | Tile                        |
| Construction:         | Tufted                      |
| Face yarn:            | 100% Nylon                  |
| Dye method:           | Solution Dyed               |
| Surface texture:      | Loop                        |
| Tile size:            | 19.6" x 19.6" (50cm x 50cm) |
| Pile weight:          | 750 gm <sup>2</sup>         |
| Finished pile height: | Average 0.236 (6.0mm)       |
| Stitches:             | 10.16 (40per 10cm)          |
| Gauge:                | 1/10"                       |

### Environmental Impact


ISO 14001  
Environmental Management System

ISO 9000  
Quality Management System




Indoor Air Quality is the only full LEED point carpet provides.  
All other provided information contributes towards LEED credits


### Installation Instructions




Monolithic



Quarter Turn



Ver.Ashlar



Multi Directional

### Performance

**Foot traffic recommendation:** Heavy Contract

**Flammability:** Pass 8/8 (ASTM D-2859//FF 1-70//16CFR 1630)

**VOC Emission:** <0.5 mg/m<sup>2</sup>/hour (CRI GLP) (ASTM D5116-06)

**Smoke Density:** Less than 450 (EN ISO 9239-1:2002)

**Critical Radiant Flux:** Class 1 (ASTM E648-08)

**Color Fastness:** 5/5 on Grey Scale (AATCC/16)

**Static Propensity:** 0.2 KV (ISO 6356)

### Warranty

**Wear:** 15 years of carpet. No more than 10 % face yarn Loss by weight in normal use. Protective chair pads are recommended under office chair with roller casters to preserve appearance and avoid premature wear.

**Edge Ravel:** Lifetime of Carpet. Guaranteed no edge ravel in normal use.

**Lightfastness:** Lifetime plus atmospheric contaminants warranty.

**Dimensional Stability:** Lifetime of carpet.

**Castor Chair:** Lifetime of carpet.



#### دفتر مرکزی

📍 تهران، خیابان دکتر شریعتی، نبش خیابان شهید کلاهدوز، برج نگین قلعهک، طبقه اول، واحد ۱۱ | ☎ ۰۲۱۲۵۹۹۱۰۰۰

#### شعبه رویا مشهد

📍 بلوار هفت تیر، برج اداری آرمیتاز گلشن، طبقه بیست و ششم، واحد ۲۶۰۱ | ☎ ۰۵۱۳ ۸۳۳۷۰۷۰

#### شعبه رویا قم

📍 قم، بلوار پیامبر اعظم، برج عمرانیه، طبقه اول اداری، واحد ۱۱۳ | ☎ ۰۲۵ ۳۷ ۸۴ ۰۶۲۱

#### شعبه رویا شیراز

📍 شیراز، بلوار شهید چمران، خیابان نیایش، بین کوچه ۱۰ و ۱۲ ساختمان لادفنس، طبقه دوم، واحد ۴ | ☎ ۰۷۱-۳۶۵۴۱۰۱۰

